




CW / SERIES

Mesh Curtain Grid

LED Screen

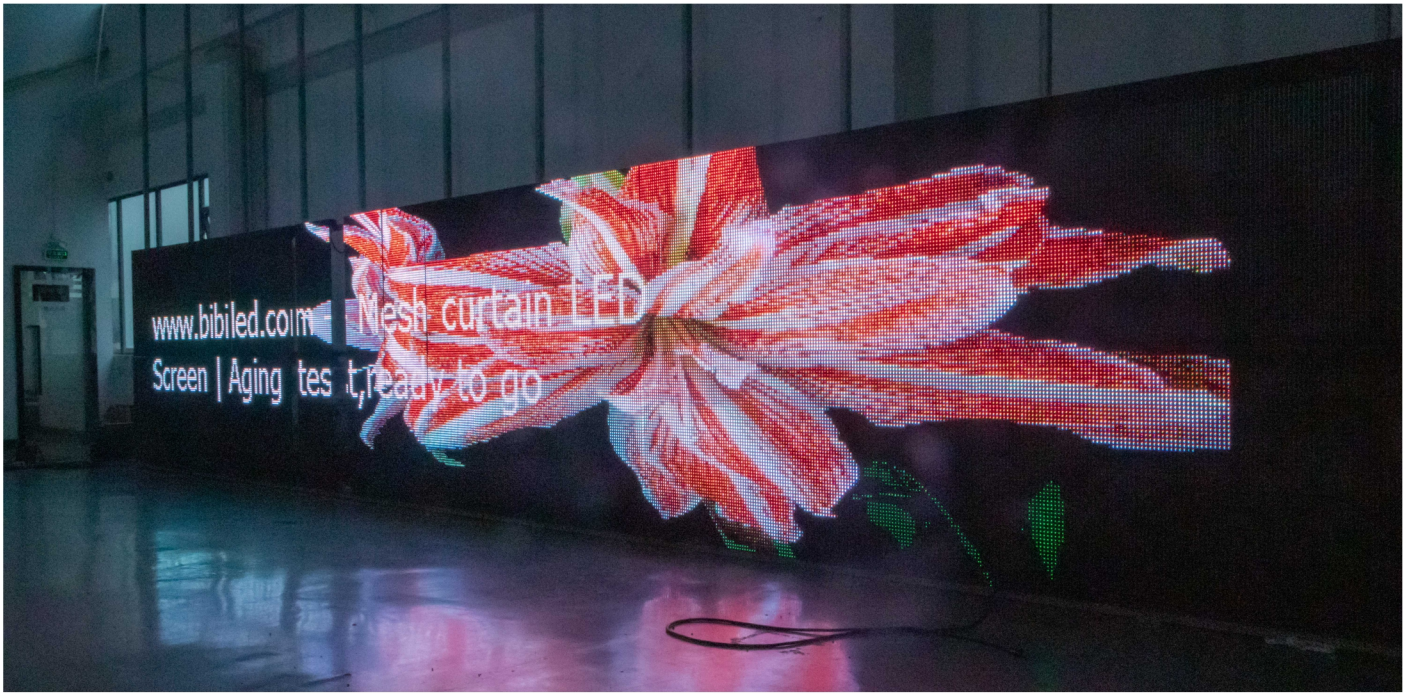

Parameters

SPECIFICATION			
Item	P15-15	P15-31	P31-31
Pixel pitch(Horizontal)	15.625mm	31.25mm	31.25mm
Pixel pitch(Vertical)	15.625mm	15.625mm	31.25mm
LED type	DIP 346		
Pixel density	4096 pixels/m2	2048 pixels/m2	1024 pixels/m2
Pixel configuration	1R1G1B full color		
Cabinet dimension(WxHxD)	W500xH1000mmxD67mm		
Transparency rate	40.0%	65%	65%
Cabinet resolution	32x64	16x64	16x32
Cabinet weight	10KG	7KG	6KG
Cabinet material	Aluminum		
Brightness	6000 ~ 10000		
Gray scale	14		
Colour temperature	6500~9300		
View angle	110/60 degree		
Contrast ratio	1600 : 1		
Power supply	100~240V		
Storage temp	-55C ~ +100C		
Operation temp	-40C ~ +65C		
Operation humidity	10% ~ 90%		
Input signal	DVI / VGA, RGBHV Composite Video signal , S-VIDEO, YPbPr(HDTV)		
IP rating(Front and rear)	IP67		
Max. Power consumption	450W/m2	350W/m2	350W/m2
Avg. Power consumption	135W/m2	105W/m2	105W/m2



CW/SERIES

Light weight reduce the pressure of your building wall

LED curtain screen is a kind of LED display used in outdoor commercial advertising; it is composed of strips in the shape of LED curtain screen, the appearance of a hollow, grid format, so it is also known as strips LED screen, grid LED screen, hollow LED screen, etc.

Features



Light weight



Transparency



Simple installation structure



Ip67 water-proof



Low consumption



Harsh temperature bear



● Lightweight

The weight is only 6KG per 500x1000mm cabinet, the thickness is 67mm, lower 75% of the regular outdoor LED billboard.




● Transparency


Transparency rate is 40~80%, makes sure the light come through into the inside of building.



● Simple installation structure

The weight of the installation structure is only 10kg/m², it reduce 80% than regular outdoor LED billboard structure.

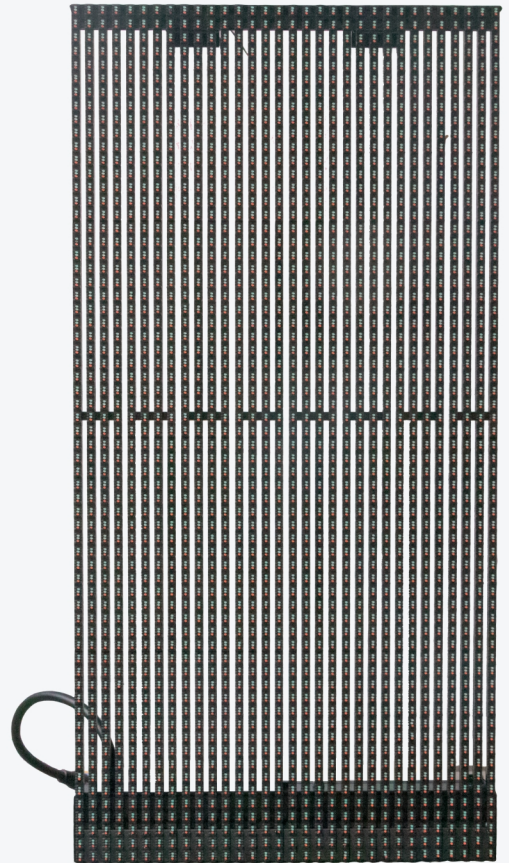

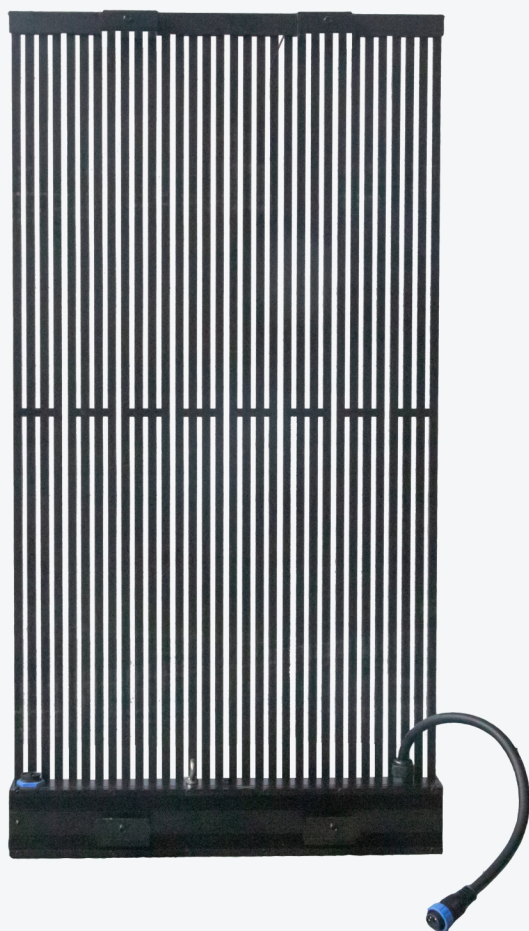


Mesh Curtain Grid

CW



Water proof

Full waterproof glue covered design, IP67 both front the back.

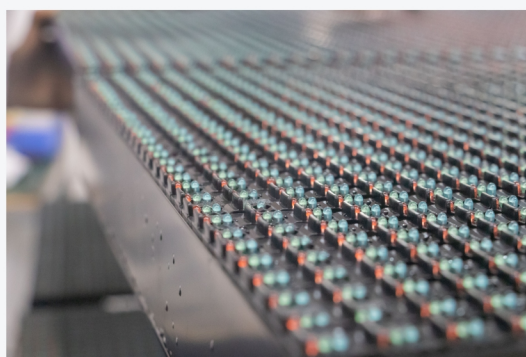

Low consumption

Special thermal conductive materials and aluminum cabinet design, great heat dissipation performance.



Harsh temperature bear

High-end lamp bead chip ensures that the LED screen can work stably under any outdoor extreme conditions.

LED Screen Manufacturer in China



www.bibiled.com



SHENZHEN BIBI LED CO LTD

Mob: +86 153 9990 6913

Web: www.bibiled.com

E-mail: info@bibiled.com

Address:

The Building C, Tangtou Industrial Park,
Shiyan Town, Baoan District, Shenzhen.