



R2 / SERIES

Stage Event Rental

LED Display



Parameters

SPECIFICATION		
Item	P3.91	P4.81
Pixel pitch	3.91 mm	4.81 mm
LED type	SMD 3 in 1	SMD 3 in 1
Pixel density	65536 pixels/m ²	43264 pixels/m ²
Pixel configuration	1R1G1B	1R1G1B
Module dimension(WxH)	250x250mm	250x250mm
Module resolution	64x64	52x52
Cabinet dimension(WxHxD)	500x500mm/500x1000mm	500x500mm/500x1000mm
Cabinet resolution	128x128/128x256	104x104/104x208
Screen weight	30kg/m ²	30kg/m ²
View angle	H140°/ V140°	H140°/ V140°
Best viewing distance	4	5
Brightness	800 ~ 1000	4000~4500
Gray scale	14	
Colour temperature	3200~9300	
Refresh rate	1920	
Contrast ratio	5000 : 1	
Power supply	100~240V	
Storage temp	-20°C~+60°C	
Operation temp	-20°C~+50°C	
Operation humidity	5%~95%RH	
Input signal	DVI / VGA, RGBHV Composite Video signal , S-VIDEO, YPbPr(HDTV)	
Driving method	1/16 dynamic	1/13 dynamic
Max. Power consumption	800W/m ²	800W/m ²
Avg. Power consumption	280W/m ²	280W/m ²



R2 / SERIES

Rental LED Display Good Price Performance

R3 Series is an rental LED display could use for both indoor and outdoor applications. It is used for concert, wedding party, light stage, T-stage show, exhibitions, etc. R3 Series is the right one to choose if you need good price performance option.

Features



Energy saving



Fast assemble



Ultra light cabinet




High precision



Solidly-built architecture




IP65

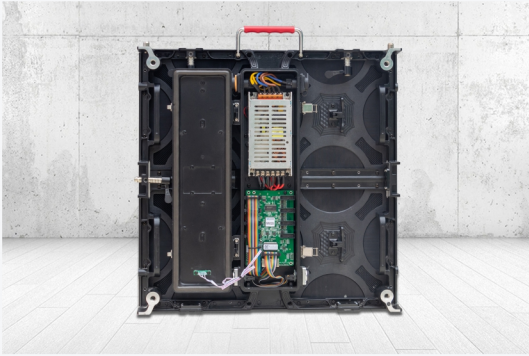

● Energy saving

With the aluminum heat sink design, no fan needed for ventilation. It guarantees the LED screen to be noiseless and energy-saving.

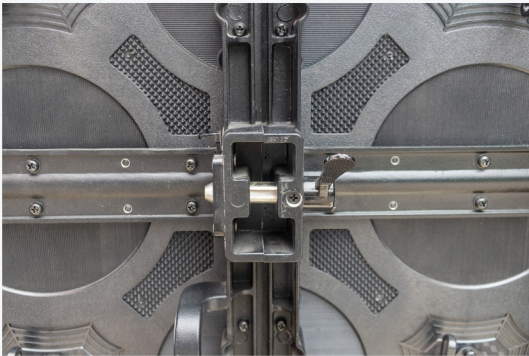

● Fast assemble


With fast lock design, R3 series is more easy and fast to assemble and disassemble



● Ultra light cabinet


The cabinet is made of die-cast aluminum, it is only 30KG per square, one hand can be lifted, the scheme installation and transportation



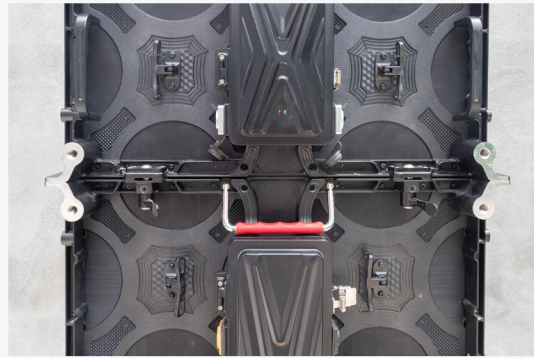

● High precision

With high-end CNC fine machining on die-casting aluminum cabinet structure, precision control of R3 series within 0.1mm, which keeps R3 with good flatness and smooth visual performance.

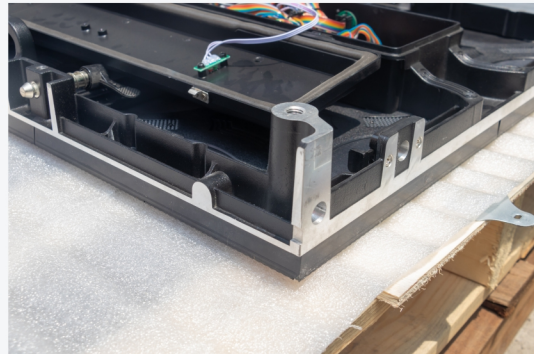

● Solidly-built architecture

The design of the cabinet has been carefully designed by engineers, and each connection is reinforced to ensure that the cabinet is stable enough during use.



● Ip65 waterproof protection

With ingress protection rating up to IP65, R3 series is able to work in all weather.

LED Screen Manufacturer in China



www.bibiled.com



SHENZHEN BIBI LED CO LTD

Tel: +86 755 8528 8654

Web: www.bibiled.com

E-mail: info@bibiled.com

Address:

The Building C, Tangtou Industrial Park,
Shiyan Town, Baoan District, Shenzhen.